


01, 03 Base Block

Features

This block, which allows piping from both sides, is designed for use with combinations of two or more solenoid valves and modular valves.

Understanding Model Numbers


MOB - 01 X - B3 - 10

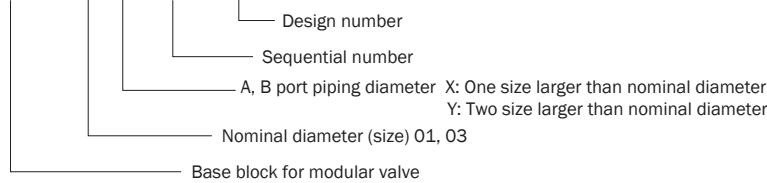

Note: Another series of multi-pump blocks is available for the MBS and MBW Series NACHI PACK. For details, see page L-24.

Installation Dimension Drawings

01 (nominal diameter) base block
MOB-01X-B*-10

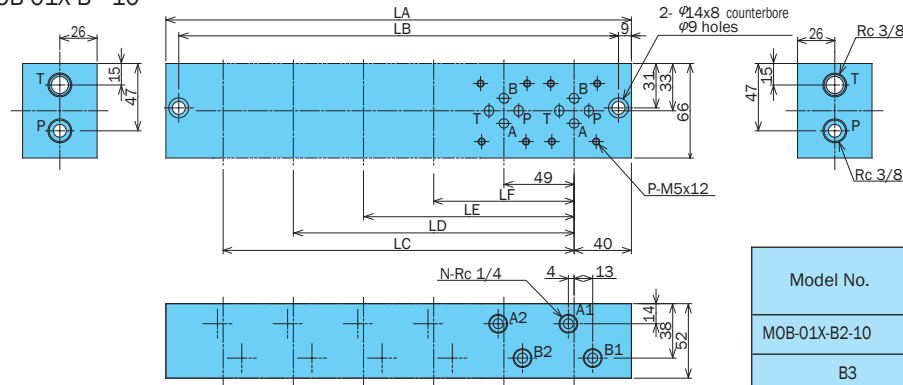


Plug Tightening Torque

Plug Configuration	Tightening Torque N ft lbs
TPHA-1/4	13.4 to 22
TPHA-3/8	29.5 to 35

Model No	Pipe Outlet Size (A, B)	Maximum Working Pressure psi	Recommended Flow Rate gpm
MOB-01X-B*-10	1/4	3625	5.2

Model No.	LA	LB	LC	LD	LE	LF	N	P	Weight lbs						
MOB-01X-B2-10	129	111	-	-	-	-	4	8	6.1						
B3	178	160													
B4	227	209													
B5	276	258													
B6	325	307								245	196	147	8	12	10.8
													10	20	13.0
						12	24	15.2							

MOB-01Y-W*-10

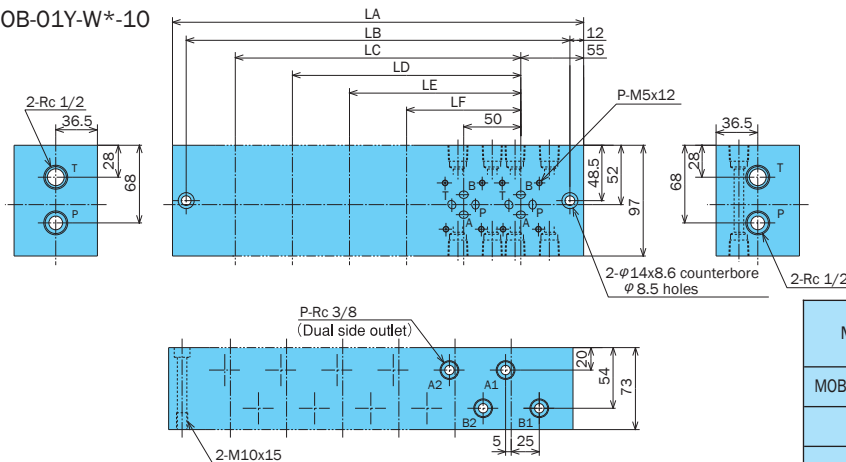


Plug Tightening Torque

Plug Configuration	Tightening Torque N ft lbs
TPHA-3/8	29.5 to 35
TPHA-1/2	40.5 to 48

Model No	Pipe Outlet Size (A, B)	Maximum Working Pressure psi	Recommended Flow Rate gpm
MOB-01Y-W*-10	3/8	3625	10.5

Model No.	LA	LB	LC	LD	LE	LF	P	Weight lbs					
MOB-01Y-W1-10	110	86	-	-	-	-	4	11.2					
W2	160	136											
W3	210	186											
W4	260	236											
W5	310	286							200	150	100	16	26.0
W6	360	336							250			20	30.8
						24	35.7						

03 (nominal diameter) base block
 MOB-03X-B*-(J)30

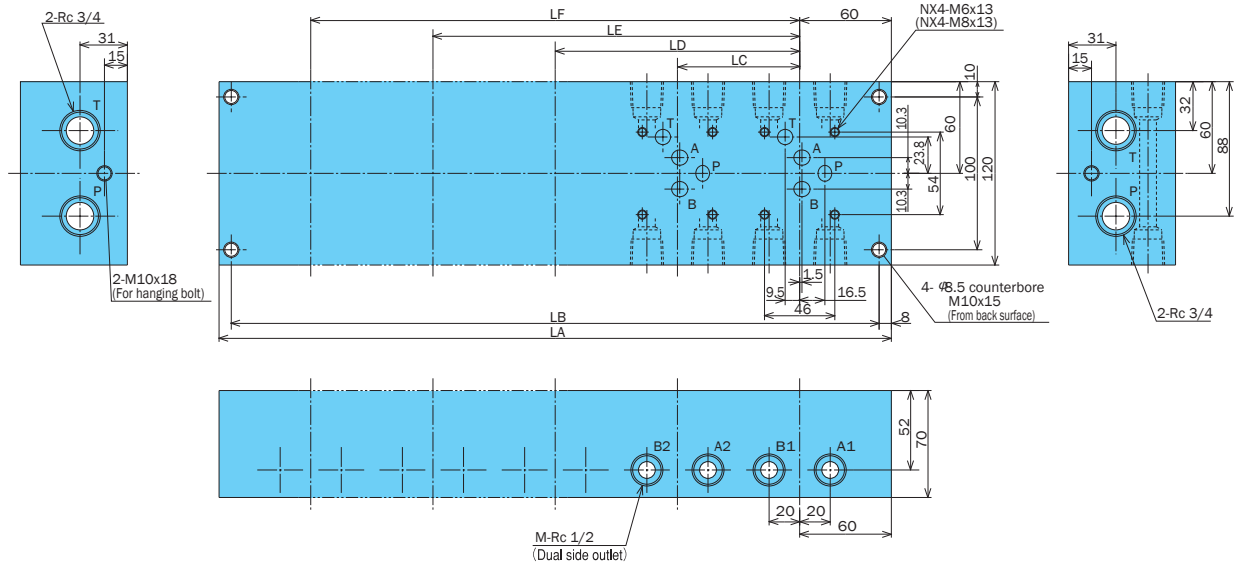

Plug Tightening Torque

Plug Configuration	Tightening Torque N ft. lbs
TPHA-1/2	40.5 to 48
TPHA-3/4	66 to 73.7

Model No	Pipe Outlet Size (A, B)	Maximum Working Pressure psi	Recommended Flow Rate gpm
MOB-03X-B*-(J) 30	1/2	3625	21.1

Model No.	Dimensions								Weight lbs
	LA	LB	LC	LD	LE	LF	M	N	
MOB-03X-B2-(J) 30	200	184	80	-	-	-	8	2	22.7
B3	280	264	80	160	-	-	12	3	31.5
B4	360	344	80	160	240	-	16	4	40.5
B5	440	424	80	160	240	320	20	5	49.3

Note: Dimensions in parentheses are for model number MOB-03X-B*-30, which is the model number when using M8 valve mounting bolts.